
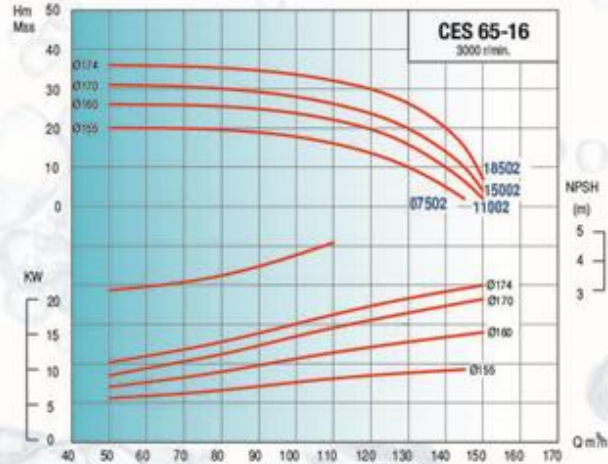


CES 65 (3000 d/d) MONOBLOK SALYANGOZ POMPALAR VOLUTE CASING CLOSE-COUPLED PUMPS

TİP TYPE	Bağlantı Giriş x Çıkış Inlet x Outlet	MOTOR					m ³ /h	Debi (Q) - Capacity						
		HP	kW	IEC	V	A		d/d	Hm (mss)	20	45	90	115	120
CES 65-13 04002	3" x 2.5"	5,5	4	100L	380	8	3000	Hm (mss)	15	13	9	4	2	
CES 65-13 05502		7,5	5,5	112M	380/660	10,9			18	16	12	7	5	1
CES 65-13 07502		10	7,5	112M		14,1			21	20	16	11	9	2
CES 65-13 11002		15	11	132M		21			24	23	20	15	13	6

TİP TYPE	Bağlantı Giriş x Çıkış Inlet x Outlet	MOTOR					m ³ /h	Debi (Q) - Capacity						
		HP	kW	IEC	V	A		d/d	Hm (mss)	50	115	125	140	145
CES 65-16 07502	3" x 2.5"	10	7,5	112M	380/660	14,1	3000	Hm (mss)	20	15	12	5	2	
CES 65-16 11002		15	11	132M		21			26	21	18	10	6	2
CES 65-16 15002		20	15	160L		28			31	26	22	14	10	4
CES 65-16 18502		25	18,5	160L		34			36	32	28	20	16	7

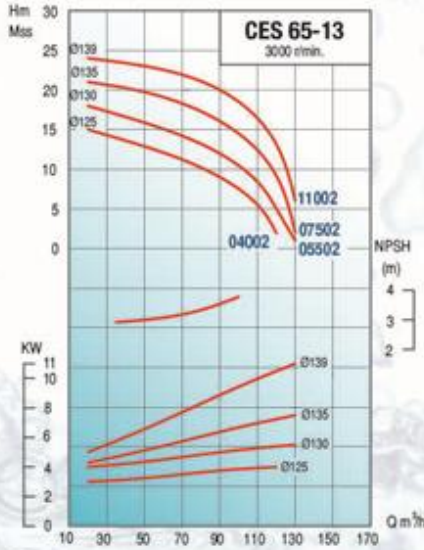

TİP TYPE	Boyutlar - Dimensions (mm)								Ağırlık - Weight
	A	L	h1	h2	H	E	n1	n2	Kg
CES 65-13 04002	100	575	160	180	340	284	280	212	34
CES 65-13 05502	100	575	160	180	340	284	280	212	38
CES 65-13 07502	100	620	160	180	340	284	280	212	44
CES 65-13 11002	100	681	160	180	340	284	280	212	65
CES 65-16 07502	100	649	160	200	360	295	280	212	73
CES 65-16 11002	100	709	160	200	360	295	280	212	94
CES 65-16 15002	100	777	160	200	380	350	280	212	131
CES 65-16 18502	100	777	160	200	380	350	280	212	151

